




FOLDING CLOSURES } ROLLER GRILLES } ROLLER SHUTTERS

Aluminium Roller Shutter

A strong and attractive all-purpose aluminium vision roller shutter with a wide range of applications including: severies, kiosks, shop fronts, arcades, cabinets, truckbodies, carports and all areas needing concealment from public view. This roller shutter door is dust and vermin proof, easy to clean and meets food hygiene regulations.



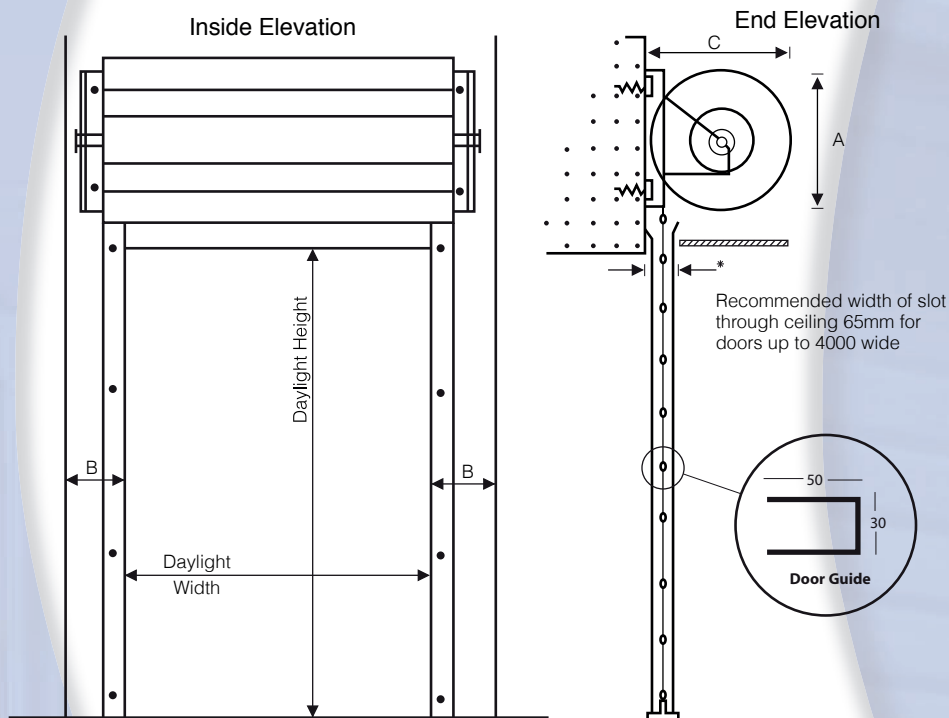

	HEADROOM A	SIDEROOM B	PROJECTION C
Doors up to 1000mm	260	100	260
Doors up to 2000mm	350	100	350
Doors up to 3000mm	400	100	400
Mullions - refer to data sheets			

SPECIFICATIONS

Curtain: Extruded aluminium interlocking door slats fitted with nylon endlocks to control lateral movement & reduce noise and friction. The screen can be perforated for vision or ventilation if required.

Bottom Rail: Extruded Aluminium Section incorporating a mohair brush strip underneath to prevent damaging the floor or counter top surfaces. Bottom rail is designed to retract flush with ceiling or lintel when door is opened. Two point double sided deadlocking for security allowed keyed access from either side of door. Internal thumb turn locking optional.

Guides: Extruded Aluminium channel 30mm wide x 50mm deep, fixed conventionally behind door jambs or recessed into wall. Flared at top for smooth entry at screen.

Barrel: 200mm diameter door drum for minimal deflection of door screen across opening. Torsion springs calculated to balance screen weight for lightweight operation.

Motorising: Several options available in single or 3 phase models. Additional clearances required, refer to separate data sheets. Optional extras include UPS Battery Backup (single phase), External Keyswitch & Remote Control.

Mullions: Removable mullions are used to separate multiple doors in cases of very wide or angled openings when full access is required. The door tracks being removable leaving opening unobstructed.

Standard Finish: Satin Silver Anodised Aluminium. Powder coating of a wide range of colours available as an optional extra.

Maximum recommended size for manual doors is 3600 wide x 3000 high. Contact us for recommendations over this size.

Scotty Doors Ltd has a continuing programme of product development and reserves the right to alter specifications at any time without notice. A full range of extra details available at www.scottydoors.com

Distributed by:

Manufactured by:

6 Atlas Place,
Mairangi Bay,
North Shore City,
Auckland, New Zealand
P O Box 305041, Triton Plaza, North Shore City 0757,
Auckland, New Zealand
Phone: 0800 760 687 or +64 9 479 4779
Fax: +64 9 479 4771
Email: www.scottydoors.com

