

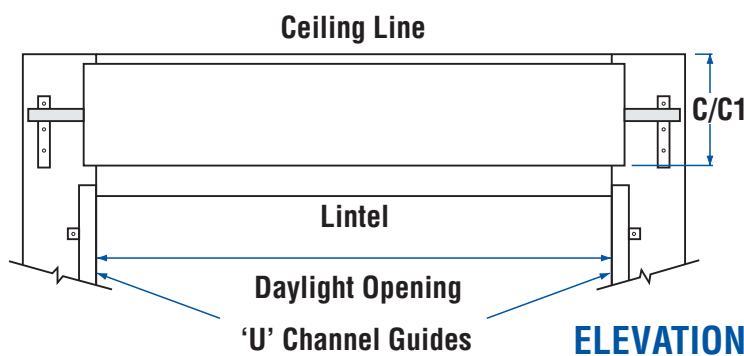
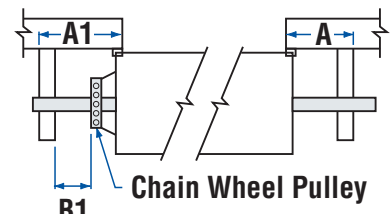


S3 Roll-A-Door Framing Instructions

For Series 3 Roller Doors Up To 3.30m High

Note: With ongoing product developments, the manufacturer retains the right to change products & specifications without notification. If a specification is critical to the end use, please discuss with your Local Dealer first. Illustrations are not accurate representations of product, and are for illustrative purposes only, not to scale. All measurements should be made by your Local Dealer for clarification.

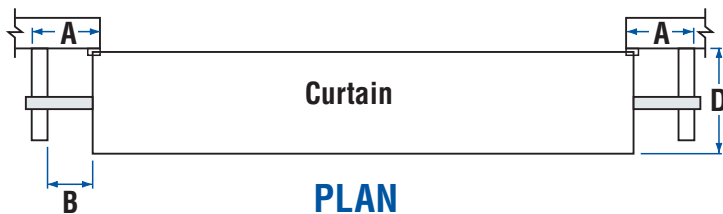

REBATE DETAIL - STD GUIDES
100mm Past Opening
120mm Inside Building

DIMENSIONS

- A1*** Denotes sideroom required for installation of an opener when mounted on the door bracket. (Garador Openers only)
- B** Denotes non geared end of curtain
- B1** Denotes geared end of curtain
- C1 & E1** Denotes restricted headroom installation requirements
- C & E** Is recommended.

All measurements are in millimetres and are minimum unless otherwise shown.

HEIGHT	A	A1	A1*	B	B1	C	C1	D	E	E1	F	OPERATION
UP TO 2400	135	125	235/110	35	N/A	540	475	555	245	180	295	Hand Operated
2401 - 3300	195	225	235/110	35	5	620	555	565	310	245	310	Direct Drive

Note: Installations with only minimal clearances may incur additional costs. Consult your Dealer.

0800 427 236
www.garador.co.nz

Contact: